

SPECIFICATION SHEET

V3.0



COVENANT ONYX 1750

DESCRIPTION

Informed by the interlocking components of a snake's spine, Covenant is Lost Profile's contemporary take on a traditional chandelier.

MATERIALS

Brass, Onyx, acrylic, LED.

DIMENSIONS

Diameter: 1800mm (70.9")
Height: 216mm (8.5")

WEIGHT

60kg (132.3lbs)

LAMPING

LED strip

LED COLOUR TEMP

Warm White 3000k
2700k Available upon request
No upcharge

VOLTAGE/WATTAGE

12V DC @ 130W

LUMENS/CRI

9750lm @ 90+ CRI*
*From the source

DRIVER

12V 150W 0-10V DIMMABLE

STANDARD FINISHES

Blonde Brass, Aged Brass, Dark Bronze (these finishes are waxed)

CUSTOM SURFACE FINISHES

Brushed Nickel, Chrome plating (Add 20%)
Clear enamel & powder coated finishes available on request (Add 10%)

MAINTENANCE

All LOST PROFILE metal surfaces are waxed. These metal surfaces are designed to age and patinate. Wear gloves when handling to avoid hand prints.

CEILING CANOPY

Option 1 - Standard: x1 Round Surface canopy (Remote)

Ø250 x 50mm (Ø9.8 x 2.0in).

Option 2 - Vertical Wires: x4 Round Flush canopies (Remote)

Ø100 x 6mm (Ø3.9 x 0.2in).

Option 3 - Surface Canopy: x1 Round Surface canopy (Integral)

Ø350 x 50mm (Ø13.8 x 2.0in). Upcharge applies.

COVENANT ONYX 1750 is supplied with 4 x 2000mm (78.8") suspension wires and 2000mm (78.8") of clear 2-core power cable.

Please advise us if you require longer suspension wires & power cable.

INSTALLATION

Assembly required upon installing COVENANT as the Diffusers are supplied separately to the internal substrate ring.

Allow 1 hour for installing the Diffusers onto the ring. See installation guide for details.

DRIVERS & DIMMING


LOST PROFILE products are supplied with 0-10V dimmable LED drivers.

PHASE & DALI Dimmable drivers are available for some regions, upon request.

The location of the driver needs to be considered, whether in a ceiling cavity, in a wall cavity, or ideally in an accessible electrical cabinet.


PRICING & LEAD TIMES

Please contact us or your nearest LOST PROFILE representative for current pricing and lead times.

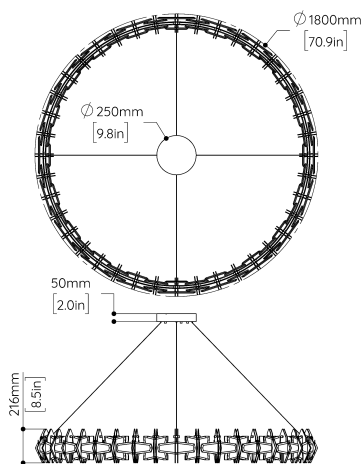

OPTION 1 (STANDARD)

Surface Canopy
Remote power supply

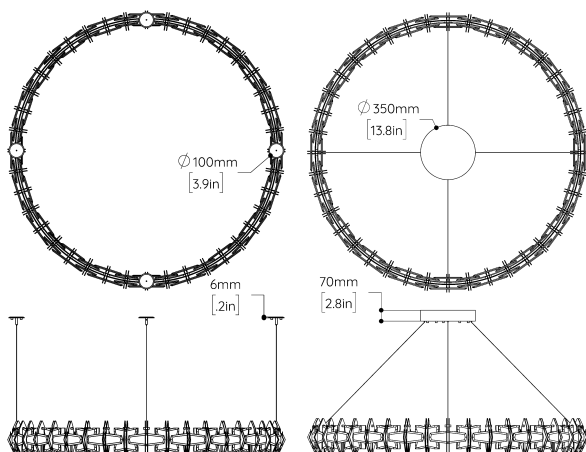

OPTION 2

Vertical wires
x4 Round Flush Canopies
Remote power supply
No upcharge

OPTION 3

Surface Canopy
Integral power supply
Upcharge applies

