

SPECIFICATION SHEET

V3.0



COVENANT ONYX LINEAR 2100

DESCRIPTION

Informed by the interlocking components of a snake's spine, Covenant is Lost Profile's contemporary take on a traditional glass chandelier.

MATERIALS

Brass, Onyx & aluminium

DIMENSIONS

Length: 2100mm (82.7")
Width: 116mm (4.6")
Height: 216mm (8.5")

WEIGHT

21kg (46.3lbs)

LAMPING

LED strip

LED COLOUR TEMP

Warm White 3000k
2700k Available upon request
No upcharge

VOLTAGE/WATTAGE

12V DC @ 50W

LUMENS/CRI

3750lm @ 90+ CRI*
*From the source

DRIVER

12V 60W 0-10V DIMMABLE

STANDARD FINISHES

Blonde Brass, Aged Brass, Dark Bronze (these finishes are waxed)

CUSTOM SURFACE FINISHES

Brushed Nickel, Chrome plating (Add 20%)
Clear enamel & powder coated finishes available on request (Add 10%)

MAINTENANCE

All LOST PROFILE metal surfaces are waxed. These metal surfaces are designed to age and patinate. Wear gloves when handling to avoid hand prints.

ROD LENGTH

LOST PROFILE offers rods at four lengths

(mm): 250, 500, 750, 1000

(in): 9.8, 19.7, 29.5, 39.4

Two rods up to 1000mm (39.4") are included in the price of this item.
Please consider the height of the fixture itself when selecting a rod.
Additional rods are extra.

CANOPY

Option 1 - Standard: x2 100mm Round Flush canopies (Remote)

Ø100 x 6mm (Ø3.9 x 0.2in).

Option 2 - Surface Canopy: x1 Linear Surface canopy (Integral)
1225 x 100 x 50mm (48.2 x 3.9 x 2.0in) Upcharge applies.

INSTALLATION

Assembly required upon installing COVENANT as the Onyx is supplied separately to the frame.

Allow 1/2 hour for installing the Onyx onto the frame. See installation guide for details.

DRIVERS & DIMMING


LOST PROFILE products are supplied with 0-10V dimmable LED drivers.

PHASE & DALI Dimmable drivers are available for some regions, upon request.

The location of the driver needs to be considered, whether in a ceiling cavity, in a wall cavity, or ideally in an accessible electrical cabinet.


PRICING & LEAD TIMES

Please contact us or your nearest LOST PROFILE representative for current pricing and lead times.

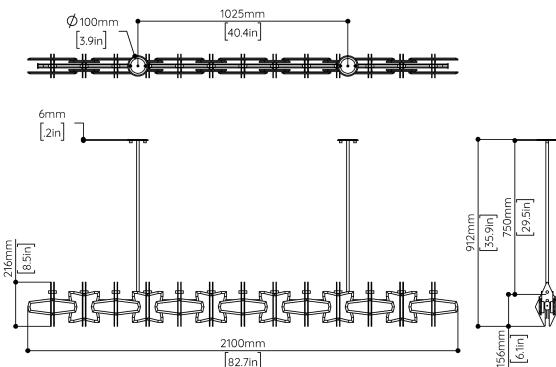

OPTION 1 (STANDARD)

Flush Canopy
Remote power supply

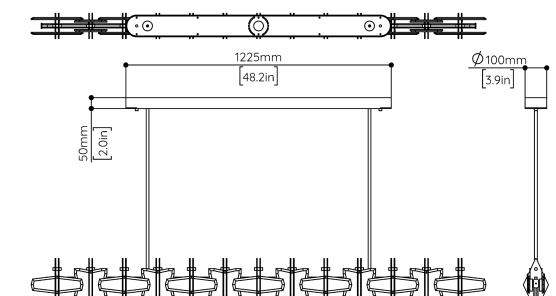

OPTION 2

Surface Canopy
Integral power supply
Upcharge applies

