

SPECIFICATION SHEET

V3.0



DISTANCE 1800 PENDANT

DESCRIPTION

The Distance family takes cues from distant times and places; from Neo-noir cinema to Art Deco banks built in the 1920's.

MATERIALS

Brass, acrylic, LED.

DIMENSIONS

Length: 1810mm (71.5")

Width: 40mm (1.6")

Height: 100mm (3.9")

WEIGHT

8kg (17.6lbs)

LAMPING

LED strip

LED COLOUR TEMP

Warm White 3000k

2700k Available upon request

No upcharge

VOLTAGE/WATTAGE

12V DC @ 40W

LUMENS/CRI

3000lm @ 90+ CRI*

*From the source

DRIVER

12V 60W 0-10V DIMMABLE

STANDARD FINISHES

Blonde Brass, Aged Brass, Dark Bronze (these finishes are waxed)

CUSTOM SURFACE FINISHES

Brushed Nickel, Chrome plating (Add 20%)

Clear enamel & powder coated finishes available on request (Add 10%)

METAL SURFACE MAINTENANCE

All LOST PROFILE metal surfaces are waxed. These metal surfaces are designed to age and patinate. Wear gloves when handling to avoid hand prints. Clear enamel coating is available on request. Enamelling does not stop the patination process, it just slows the process down.

ROD LENGTH

LOST PROFILE offers rods at four lengths

(mm): 250, 500, 750, 1000

(in): 9.8, 19.7, 29.5, 39.4

Two rods up to 1000mm (39.4") are included in the price of this item.

Please consider the height of the fixture itself when selecting a rod.

Additional rods are extra.

CANOPY

Option 1 - Standard: x2 100mm Round Flush canopies (Remote)

Ø100 x 6mm (Ø3.9 x 0.2in).

Option 2 - Surface Canopy: x1 Linear Surface canopy (Integral)

1075 x 100 x 50mm (42.3 x 3.9 x 2.0in) Upcharge applies.

DRIVERS & DIMMING



LOST PROFILE products are supplied with 0-10V dimmable LED drivers.

PHASE & DALI Dimmable drivers are available for some regions, upon request.

The location of the driver needs to be considered, whether in a ceiling cavity, in a wall cavity, or ideally in an accessible electrical cabinet.

PRICING & LEAD TIMES


Please contact us or your nearest LOST PROFILE representative for current pricing and lead times.

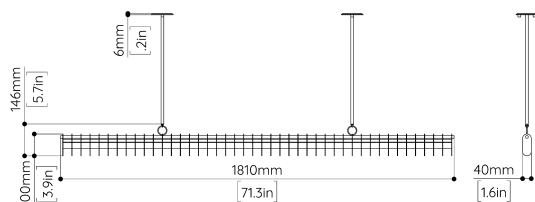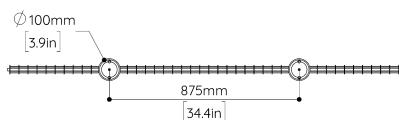

OPTION 1 (STANDARD)

Flush Canopy

Remote power supply

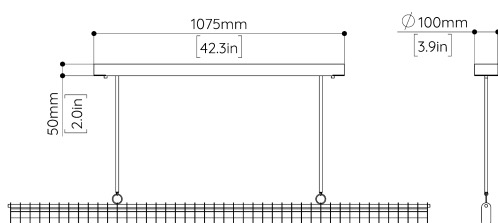

OPTION 2

Surface Canopy

Integral power supply

Upcharge applies

