

SPECIFICATION SHEET

V3.0



PYRE 1 PENDANT

DESCRIPTION

Tubes of frosted glass at varying lengths break free from their brass cages. PYRE is inspired by the exploding sparks of a Blacksmith's hammer.

MATERIALS

Brass & glass

DIMENSIONS

Length: 1853mm (73.0")
Width: 43mm (1.7")
Height: 586mm (23.1")

WEIGHT

5kg (11lbs)

LAMPING

LED G4 Globe

LED COLOUR TEMP

Warm White 2700k

VOLTAGE/WATTAGE

12V DC @ 5W

LUMENS

300lm

*From the source

DRIVER

12V 25W 0-10V DIMMABLE

STANDARD FINISHES

Blonde Brass, Aged Brass, Dark Bronze (these finishes are waxed)

CUSTOM SURFACE FINISHES

Brushed Nickel, Chrome plating (Add 20%)

Clear enamel & powder coated finishes available on request (Add 10%)

MAINTENANCE

All LOST PROFILE metal surfaces are waxed. These metal surfaces are designed to age and patinate. Wear gloves when handling to avoid hand prints.

MAINTENANCE

All LOST PROFILE metal surfaces are waxed. These metal surfaces are designed to age and patinate. Wear gloves when handling to avoid hand prints.

ROD LENGTH

LOST PROFILE offers rods at four lengths

(mm): 250, 500, 750, 1000

(in): 9.8, 19.7, 29.5, 39.4

Three rods up to 1000mm (39.4") are included in the price of this item.

Please consider the height of the fixture itself when selecting a rod.

Additional rods are extra.

CEILING CANOPY

Option 1 - Standard: Flush Canopy: x1 Round Flush canopy (Remote)

Ø150 x 6mm (Ø5.9 x 0.2in).

Option 2 - Surface Canopy: x1 Round Surface canopy (Integral)



Ø250 x 50mm (Ø9.8 x 2.0in). Upcharge applies.

DRIVERS & DIMMING

LOST PROFILE products are supplied with 0-10V dimmable LED drivers.

PHASE & DALI Dimmable drivers are available for some regions, upon request.



The location of the driver needs to be considered, whether in a ceiling cavity, in a wall cavity, or ideally in an accessible electrical cabinet.

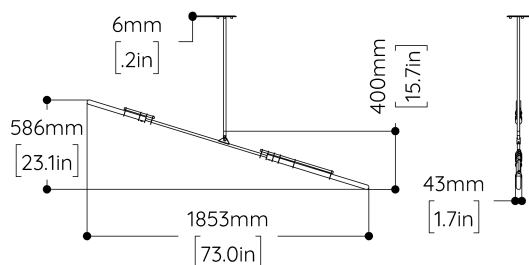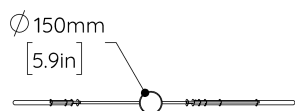

OPTION 1 (STANDARD)

Flush Canopy

Remote power supply

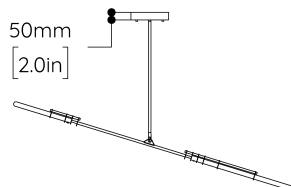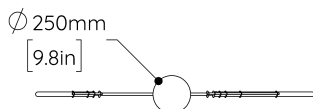

OPTION 2

Surface Canopy

Integral power supply

Upcharge applies

